

Standard equipment

- ✎ Swing beam hydraulic shear
- ✎ Heavy-duty, all-welded-steel rigid frame
- ✎ Hold-down pressure adjustment depending on cutting pressure
- ✎ Colour Touch Screen 10,4"
- ✎ Programmed cutting length
- ✎ Close hold-downs near the squaring arm for better small-part holding & cutting
- ✎ High-speed CNC back gauge with AC servomotor
- ✎ Precision lighting on the cutting line
- ✎ Specially-made cutting blades suitable for both steel and stainless steel
- ✎ Ball casters on the table
- ✎ Finger-protection safety fence (accessible)
- ✎ Safety system on the back including side doors and photocells
- ✎ Front-sheet supports 1m each with linear scale
- ✎ 1x squaring arm 1m with linear scale
- ✎ Electric parts by Siemens, Telemecanique
- ✎ Hydraulic parts by BOSCH-REXROTH




Movable Front Supports (optional)



Specially-designed rectangular hold downs, suitable for cutting narrow stripes (optional)



Colour Touch Screen 10,4", movable along machine's length (optional)

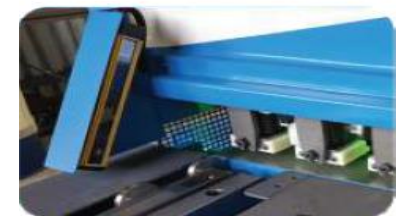

Finger protection with light guards (optional)